


ILLuminec

Led

MASTLIGHT T500 - 160lm/W
120°/90°/60°/30°/15°

100W TOT 1200W modular
Horizontal rotation 360°

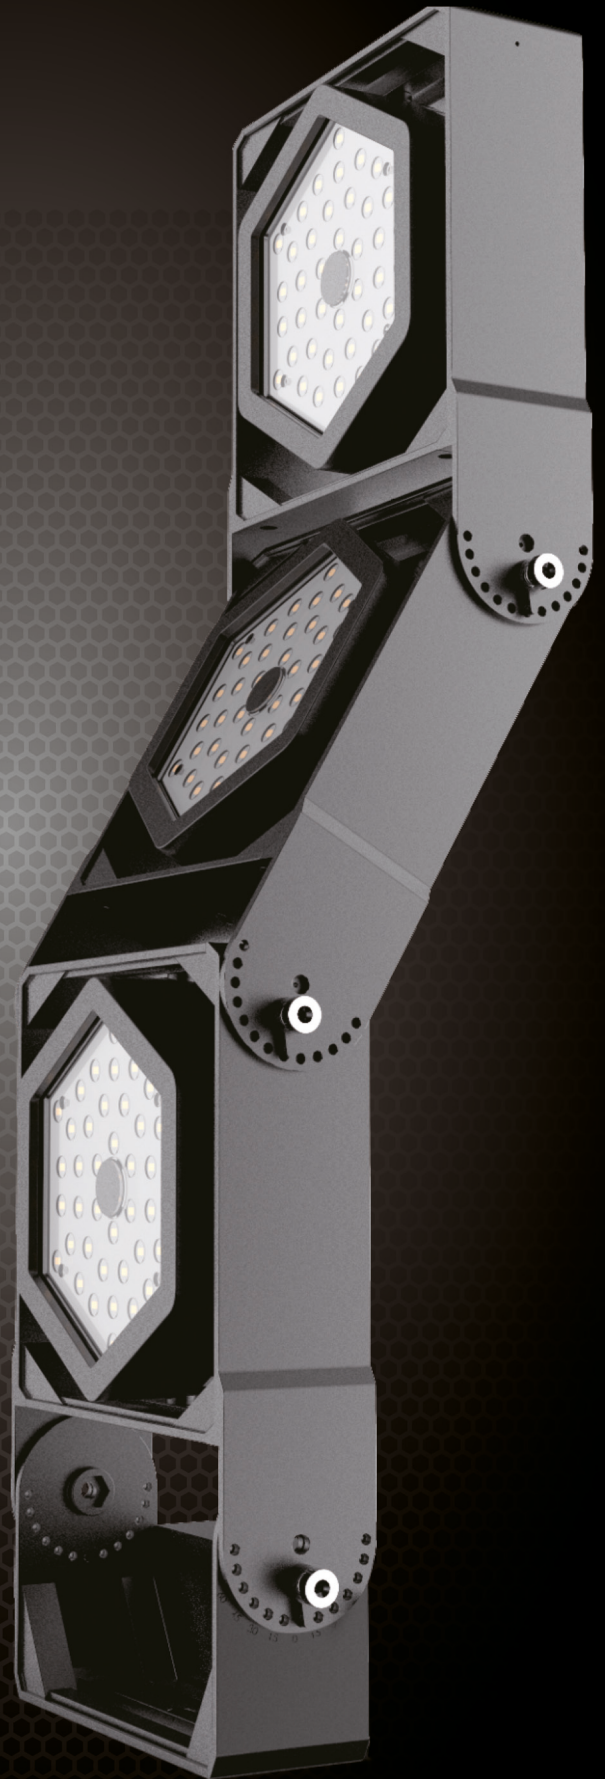

ILLuminec

Led

Mastlight T500 voor professioneel gebruik 160lm/W

Voltage	AC90-305V 50/60Hz
Led type	PHILIPS 3030 <small>PHILIPS LUMILEDS</small>
Driver	MEANWELL HLG
PF	>0.95
Luminus efficiency	160 lm/W
CCT	4000K
CRI	>75
Openingshoek	120°/90°/60°/30°/15°
Optiek	Tranparante Polycarbonaat lens + gehard glas

Behuizing Pure aluminium 1070

Levensduur LED L90>46 000 h bij TA <40°
L80>54 000 h bij TA <40°

Garantie 7 jaar

Voor omgevingstemp -30° / + 55°C
Temp tijdens opslag -40° / + 85°C

IP waarde IP67
Slagbestendigheid IK08

Certificaten



HB-T500

ILL-LHB-T500-100W740LXXX	100Watt	4000K	XXX°	16 000lm	328x208x92mm
ILL-LHB-T500-200W740LXXX	200Watt	4000K	XXX°	32 000lm	208x548x92mm
ILL-LHB-T500-300W740LXXX	300Watt	4000K	XXX°	48 000lm	208x768x92mm
ILL-LHB-T500-400W740LXXX	400Watt	4000K	XXX°	64 000lm	396x458x92mm
ILL-LHB-T500-600W740LXXX	600Watt	4000K	XXX°	96 000lm	576x419x92mm
ILL-LHB-T500-800W740LXXX	800Watt	4000K	XXX°	128 000lm	757x458x92mm
ILL-LHB-T500-900W740LXXX	900Watt	4000K	XXX°	144 000lm	639x572x92mm
ILL-LHB-T500-1200W740LXXX	1200Watt	4000K	XXX°	192 000lm	757x639x92mm

XXX = 120 -090-060-030-015





Breather


Balance temperature difference
avoid condensation

Easy and flexible adjustment

Plug safety button with spring

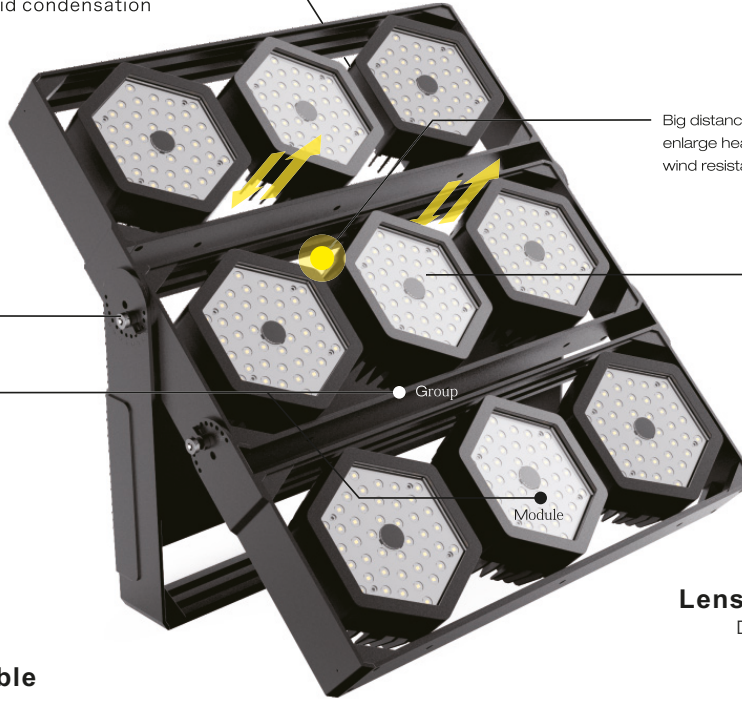

Big distance of each module which can
enlarge heat dissipation and reduce the
wind resistance



360° Angle adjustable

Module angle: 360°

Beam angle: 15° 30° 60° 90° 120°

Bracket angle: 15° 30° 45° 60° 75° 90°



Lens/Inside+Glass/Outside

Double protection for lens

MODULARIZATION ELEMENTS

